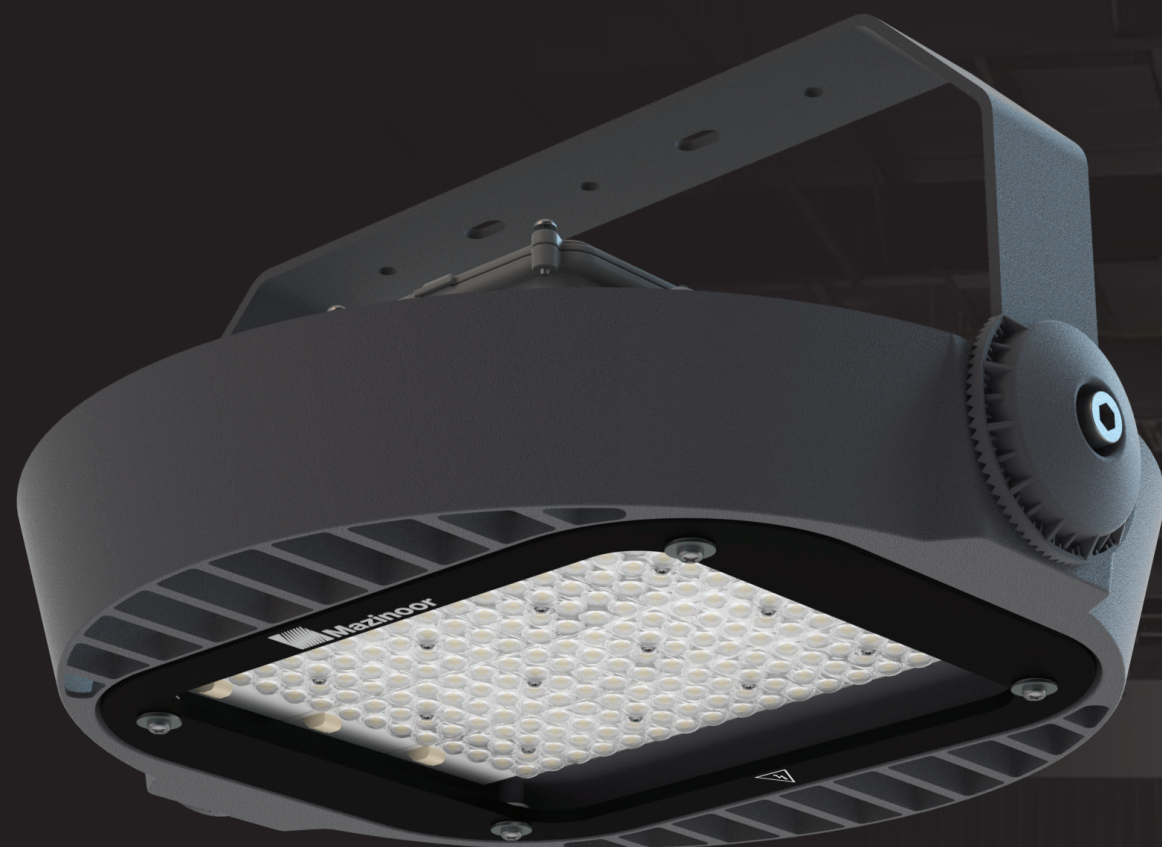




چراغ ضد نم و غبار هرکولد S

چراغ ضد نم و غبار هرکولد S با طراحی پیشرفته مازی نور با لنزهای هدفمند برای پخش نور متنوع برای محیط صنعتی طراحی شده است. ساختار محکم و بادوام و درجه حفاظت (IP66) از ویژگی‌های این چراغ است.

HERCULED S Dust & Moisture Proof High/Low Bay Luminaire

HERCULED S dust & moisture proof high/low bay luminaire is Mazinoor state of the art design suitable for surface mount or suspending in industrial area with specially designed lenses to deliver a variety of light distributions. Sturdy body and high ingress protection (IP66) are among the highlights of this luminaire.

HERCULED S Dust & Moisture Proof High/Low Bay Luminaire

Application

Suitable for high/low bay dusty industrial applications where durability, high efficacy, high ingress protection (IP66), and directed light distribution are required.

Technical Data

Body:

- Gray or milk white powder coated sturdy high pressure die-cast aluminum body
- Dacromet coated exterior screws and galvanized interior screws
- Sturdy steel handle with dacromet coated screws and graduated 5-degree scales for well controlled angle adjustment and reliable safety
- Thermal and pressure resistant silicon gasket
- Ingress protection: IP66

Optics:


- Narrow, medium, or wide light distribution with clear polycarbonate lenses with 95% efficacy
- 5-mm flat clear tempered glass diffuser



Electrical components:

- High efficacy LED modules
- Lumen Maintenance (L80) > 100,000hrs
- Color temperatures: 4000K or 5000K
- High quality constant current LED driver (PF > 0.9)
- PVC solid wire
- Polyamide cable gland
- Looping capability

Ordering Options:


- Gray or milk white powder coated aluminum body cover (upon request)
- Nano coated clear glass diffuser (upon request)



		Flicker Free	RAL 9002 RAL 7043	LED	IK 09	IP 66	Looping
M312SNLED7740-S  M312SMLED7740-S  M312SWLED7740-S 							
وزن (کیلوگرم)	رنگ نور (کلوین)	بازدهی چراغ (لومن بر وات)	شار نوری چراغ (لومن)	توان چراغ (وات)	مدل		
5.7	4000	153	23000	150	M312SNLED7740-S		
5.7	5000	153	23000	150	M312SNLED7750-S		
5.7	4000	160	24000	150	M312SMLED7740-S		
5.7	5000	160	24000	150	M312SMLED7750-S		
5.7	4000	160	24000	150	M312SWLED7740-S		
5.7	5000	160	24000	150	M312SWLED7750-S		



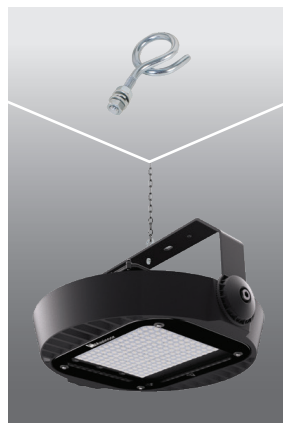
► آویختن چراغ با استفاده از یک یا دو قلاب آویز
Suspension of the luminaire with one or
◀ two provided suspension brackets






• این مدل چراغ‌ها به رنگ شیری نیز عرضه می‌شود. (M312...-W)

• Available also in gray white powder coated finishing. (M312...-W)

چراغ‌های ضد نم و غبار مدل هرکولد S



		Flicker Free	RAL 9002RAL 7043					LOOPING
M312SNLED6740-S  M312SMLED6740-S  M312SWLED6740-S 								
وزن (کیلوگرم)	رنگ نور (کلوین)	بازدهی چراغ (لومن بر وات)	شار نوری چراغ (لومن)	توان چراغ (وات)	مدل			
5.6	4000	150	15000	100	M312SNLED6740-S			
5.6	5000	150	15000	100	M312SNLED6750-S			
5.6	4000	160	16000	100	M312SMLED6740-S			
5.6	5000	160	16000	100	M312SMLED6750-S			
5.6	4000	160	16000	100	M312SWLED6740-S			
5.6	5000	160	16000	100	M312SWLED6750-S			

• Available also in gray white powder coated finishing. (M312...-W)

• این مدل چراغ‌ها به رنگ شیری نیز عرضه می‌شود. (M312...-W)